

RAV4 Installation Instructions

PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION

To safely lift and install this hardtop, you will need the assistance of at least one other person.

WARNING

The top on this vehicle is designed only for additional protection against the elements.


Do not rely on the top to contain occupants within the vehicle or to protect against intrusion of foreign objects, nor injury during an accident.

Make sure all brackets and screws are tight. Periodically


WEAR SEAT BELTS AT ALL TIMES

Installation Kit

1 each	Flange Seal	140"
2 each	Socket Cap Screws	M6 x 45
2 each	Flat Washers	M6 x 25
1 each	Tube Silicone	
1 each	Instruction Sheet	

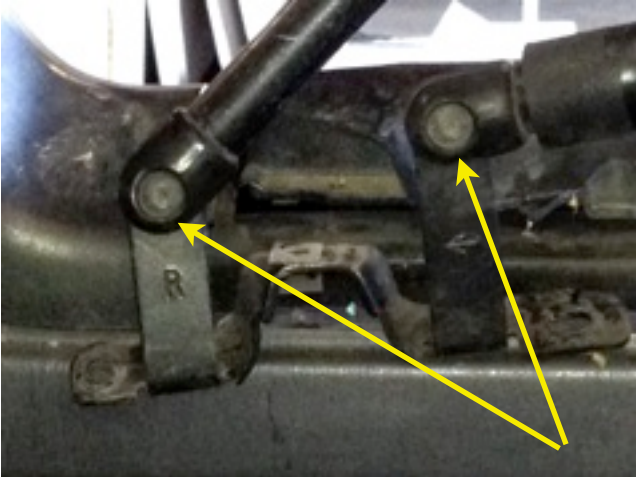

1. Using a Torx wrench remove the two bolts holding the bow assembly on both sides. Remove the soft top assembly.

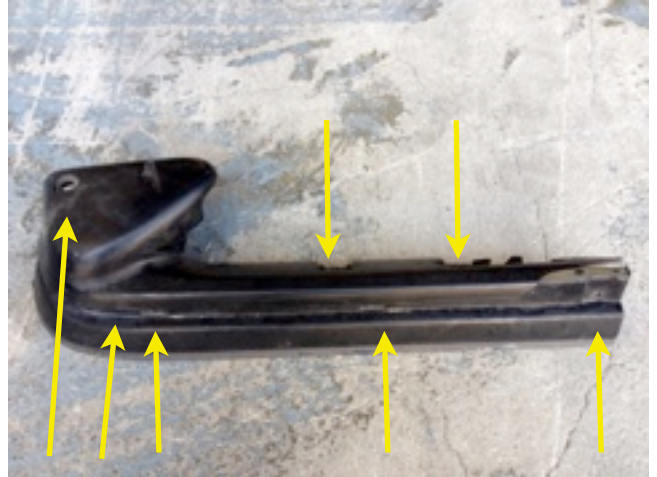

2. Removed screws from both sides of the side trim piece and remove piece.



3. Removed 5 screws from both sides of the side trim piece and remove piece.



4. Using a phillips screwdriver remove the all the screws from the plastic top brace.



5. It will look like this when removed.



6. Remove rubber perimeter seal.



7. Remove bolts and screws from metal supports and remove.



8. It will look like this when removed.



9. Remove back door brace.



10. Cut back door seal on the yellow line. Both sides.



11. It should look like this when cut.



12. Install rubber seal on flange. Start at one end and go all the way around. Press firmly to secure seal on flange. Cut off excess.




13. It should look like this when done.




14. Using supplied sealant. Fill all 15 holes that are outside of the seal that you just installed.



15. Using 2 people, install top. Front in first at a downward angle. Then lower the rear of the top. Now connect the camlocks and lock to medium tension.

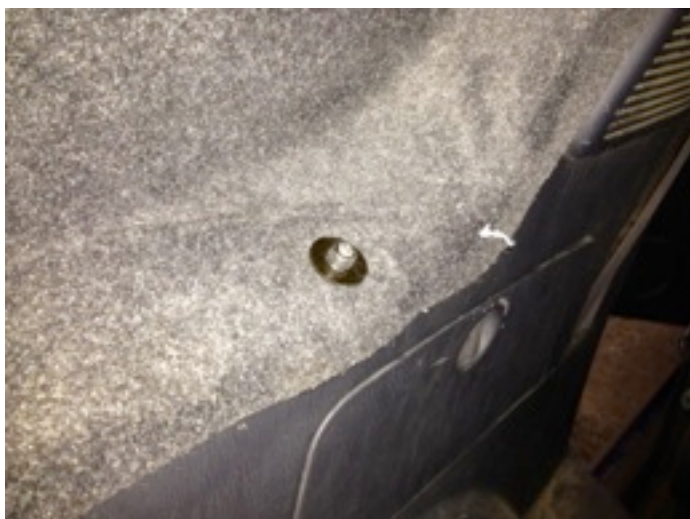

16. Install the forward socket cap screw and washer.

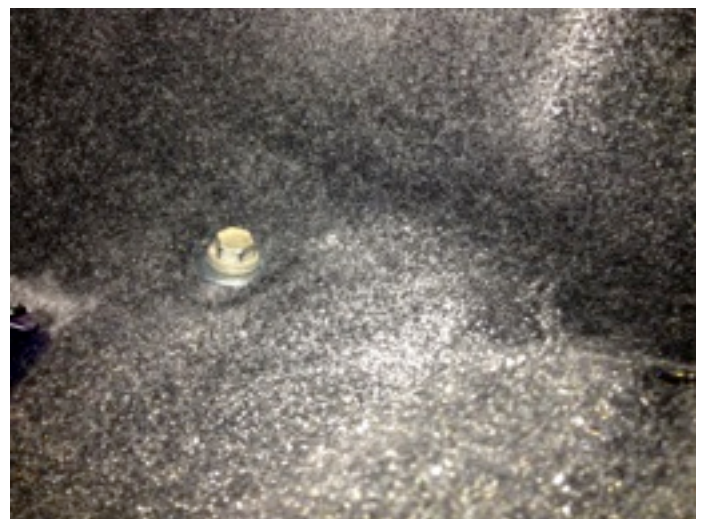

17. Locate the 1 3/4" Hex bolt with washer from the disassembly and install in the rear hole.