

1999–2004 Chevy Tracker & Suzuki Vitara Installation Instructions

PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION

To safely lift and install this hardtop, you will need the assistance of at least one other person.

Follow the instructions and perform the steps in the sequence given. Short cuts to the directions may result in an unsatisfactory installation.

WARNING

The top on this vehicle is designed only for additional protection against the elements.

Do not rely on the top to contain occupants within the vehicle or to protect against intrusion of foreign objects, nor injury during an accident.

Make sure all brackets and screws are tight. Periodically check for tightness and retighten when necessary.

WEAR SEAT BELTS AT ALL TIMES

Parts Included in the Installation Kit

4 ea.	M6 x 30 Button Head Socket Screws	In the parts bag
2 ea.	1.0" Flat Washers	In the parts bag
2 ea.	1.2" Flat Washers	In the parts bag
2 ea.	Hold Down Brackets	In the parts bag
1 ea.	Metric Key M4	In the parts bag
1 ea.	Instruction Sheet	In the parts bag
2 ea.	Rear Arms	Assembles on the front section
2 ea.	Wing Nuts	Assembles on the front section
2 ea.	5/16" Flat Washers	Assembles on the front section



1. Remove the rear soft top. First unzip the side windows. Then pull down on the rear corners to disengage the soft top. Then disengage the front of the soft top and remove.



2. Remove the front soft top. Disengage the two black front clips above the windshield. Fold the soft top back and remove the screws holding the swing arm. Then disengage the rear of the soft top and remove.



3. Remove all of the perimeter plastic hardware, with a screw driver.



4. The perimeter should look like this after step 3.



5. Using an Allen wrench, remove the two outside screws on the front section hold-down bracket. Then remove the remaining Phillips screws in the bracket and remove the bracket.



6. Remove the plastic covers from the rear bow assembly. Now remove the screws holding the bow assembly and then remove the bow assembly. Save the screws.



7. Install the hold down bracket. It has slotted screw holes. Loosely tighten the screws with the bracket at the upper end of it's travel, using the screws that you removed.



8. Using 2 people set the top on. The front part should be set in place first. It should look like this.




9. Remove the seal seen in #11 from under the top. Push at the rear of the top forward and down to set the top in place. Do one side at a time.



10. Install the front socket cap screw using two 1.2" flat washers on each bolt. Do both sides, but don't tighten.



11. Install the rear socket cap screws on each side, using the 1.0" flat washers. Now tighten them and the two front socket head bolts from step 10.

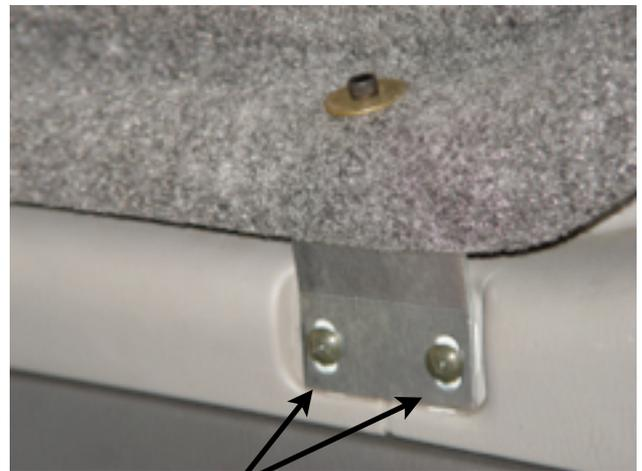

12. Now tighten the two phillips head screws on both sides,



13. Cut the rear door seal flush with the hardtop. Check the tail gate for clearance in both corners, by slowly closing the gate, to ensure that nothing is touching.



14. Using two people install the front section. Make sure the top is placed evenly on the sides. Engage the front camlock, using moderate pressure. If they are too tight follow the step 16.



15. Install the rear arms on the front section using the 5/8" flat washer and the wing nut. Now tighten both sides.



16. If it takes too much pressure to engage the camlock. Grab the clip with a vise grips and bent it down a little.



Don't forget the keys.

Enjoy!!